

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
30 September 2004 (30.09.2004)


PCT

(10) International Publication Number  
**WO 2004/082841 A1**

- (51) International Patent Classification<sup>7</sup>: **B03D 1/16**,  
1/18, 1/20, 1/22, B01F 7/22
- (21) International Application Number:  
PCT/AU2004/000315
- (22) International Filing Date: 16 March 2004 (16.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
2003901207 17 March 2003 (17.03.2003) AU
- (71) Applicant (for all designated States except US): **OUT-OKUMPU, Oyj** [FI/FI]; Riihitontuntie 7 D, FIN-02200 Espoo (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BOURKE, Peter**,
- (74) Agent: **SHELSTON IP**; 60 Margaret Street, Sydney NSW 2000 (AU).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: **AUXILIARY AGITATOR FOR A FLOTATION DEVICE**

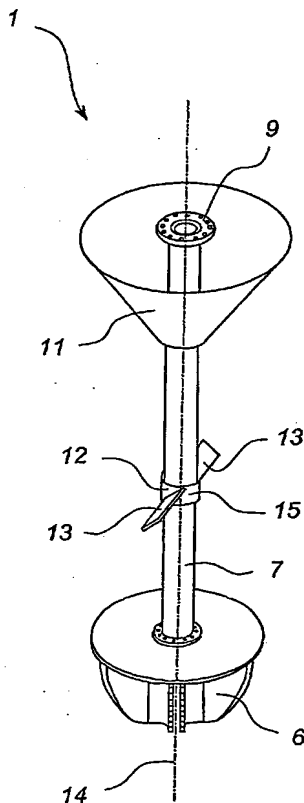

(57) Abstract: The invention provides an agitator (1) is disposed to agitate slurry within a flotation tank (2). The agitator includes a rotor (6) mounted on one end of a centrally disposed drive shaft (7) extending axially downwardly into the tank and driven by a motor (8) and associated gearbox (not shown). The other end of the drive shaft includes a mounting flange (9) adapted for connection to the motor. A stator (10) is also provided around the rotor. A froth deflection cone (11) extends around the drive shaft adjacent the top of the tank. The deflection cone is oriented such that its smallest diameter is located at its lowermost end nearest the rotor (6). An auxiliary agitator (12) is connected to the drive shaft at a position substantially midway between the underside of the deflection cone (11) and the top of the rotor (6), as shown in Figure 1 and Figure 2. The auxiliary agitator (12) includes agitation blades (13) extending radially outwardly from diametrically opposite sides of the shaft (7). Each blade (13) intersects the shaft at an angle of incidence of around 45 degrees to the shaft axis (14).



Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Declaration under Rule 4.17:**

— *of inventorship (Rule 4.17(iv)) for US only*

**Published:**

— *with international search report*

- 1 - JC20 Rec'd PCT/PTO 1 6 SEP 2009

## AUXILIARY AGITATOR FOR A FLOTATION DEVICE

FIELD OF THE INVENTION

The present invention relates to flotation devices of the type used in mineral separation and will be described hereinafter with reference to this application. However, it will be appreciated that the invention is not limited to this particular field of use.

BACKGROUND OF THE INVENTION

The following discussion of the prior art is provided to enable the invention to be placed in an appropriate technical context, and to facilitate an appreciation of the advantages that flow from it. However, references to prior art should in no way be considered as an admission that such prior art is widely known or forms part of common general knowledge in the field.

Conventional flotation devices typically include a tank to receive and contain slurry from a grinding mill, a cyclone separator, or the like. An agitator, comprising a rotor housed within a stator, is normally disposed within the tank to agitate the slurry. An aeration system is also provided to direct air under pressure into the agitator through a central conduit formed within the drive shaft. Suitable reagents are also added, which coat the surfaces of the mineral particles within the slurry to make the particles hydrophobic so as to preferentially promote bubble to particle attachment. As bubbles dispersed by the rotor rise toward the surface of the tank, they carry with them floatable valuable mineral particles, which form a mineral enriched surface froth. The froth then migrates over a lip and into a launder whereby the valuable mineral particles suspended in the froth are recovered from the tank as a mineral concentrate. The gangue particles remaining suspended in the slurry, along with those mineral particles not removed by flotation, are discharged from the tank through a bottom outlet. The bottom outlet often incorporates a dart or pinch valve, which is opened to allow the remaining slurry to progress under gravity feed to downstream treatment processes. An automatic control system, typically incorporating a liquid level sensor and a PID controller, regulates a control valve to maintain a substantially constant liquid level in the tank. The rotor disclosed in US4,078,026 is an example of a rotor that is used in prior art devices in this field.

- 2 -

As flotation devices increase in size, the agitation input energy must increase proportionally. Moreover, for a large flotation device to maintain efficiency, it must be capable of achieving a similar flotation kinetic rate as that achieved by a group of smaller cells of the same total volume.

5 In recent years, the size of flotation devices has increased, primarily for economic reasons. However, the design of such devices has remained relatively unchanged. Accordingly, for the reasons mentioned above, these large flotation devices are often not optimised in terms of flotation efficiency.

It is therefore an object of the present invention to overcome or substantially  
10 ameliorate one or more of the disadvantages of the prior art, or at least to provide a useful alternative.

#### SUMMARY OF THE INVENTION

Accordingly, a first aspect of the invention provides an auxiliary agitator for a flotation device of the type having a tank, a primary agitator including a primary rotor,  
15 drive means, and a drive shaft disposed intermediate the drive means and the primary rotor, the auxiliary agitator including:

an auxiliary agitation blade adapted, in use, to supplement an axial flow induced in the tank by the primary rotor; and

connecting means for connecting the blade to the drive shaft intermediate the drive  
20 means and the primary rotor.

Preferably, the angle of incidence is constant along the length of the blade, as in an axial impeller, at between 15 degrees and around 75 degrees with respect to the direction of travel of the blade. Alternatively, the angle of incidence varies along the length of the blade, as in a propeller. In another embodiment, the pitch of the blade is adjustable  
25 depending on specific system parameters, such as slurry density, slurry viscosity or flow characteristics within the tank.

Preferably, the blade includes a substantially straight leading edge. However, in alternative embodiments, the leading edge may be curved.

Preferably, the blade is releasably connected to the shaft to allow its position along  
30 the shaft to be adjusted. However, the blade is preferably connected to the shaft at around the midheight of the tank.

- 3 -

Preferably, the connecting means include a clamp. More preferably, the clamp is formed of two inter-engageable clamping halves. More preferably, the two clamping halves are substantially identical. Even more preferably, inner walls of the clamp together define a generally cylindrical clamping surface. Alternatively, the connecting  
5 means take the form of welds or bolts.

Preferably, the agitator includes a resilient protective layer coating its exterior surfaces. More preferably, the layer is greater than 3mm thick. Even more preferably, the layer is between around 5mm and around 7mm thick.

Preferably, the agitator includes a pair of the auxiliary blades, in use extending  
10 radially outwardly from diametrically opposite sides of the shaft, each blade having associated connecting means. Alternatively, the agitator includes at least three of the blades, in use equally spaced around the perimeter of the shaft, each blade having associated connecting means.

Preferably, in use, each blade intersects the shaft at an angle of incidence of  
15 around 45 degrees.

According to a second aspect, the invention provides agitation means for a flotation device of the type previously defined, said agitation means including:

a drive shaft;

a primary rotor connected to one end of the drive shaft to form the primary  
20 agitator; and

an auxiliary agitator as defined above.

Preferably, the agitation blade is releasably connected to the shaft to allow its position along the shaft to be adjusted. However, the blade is preferably located substantially at the midpoint of the drive shaft.

25 Preferably, the agitation means are suitable for use in a three phase environment including water, solids and air.

According to a third aspect, the invention provides a flotation device including:

a tank for containing slurry incorporating minerals to be extracted;

a feed inlet for admission of slurry into the tank;

30 agitation means, as defined above, to agitate the slurry within the tank; and

aeration means to aerate the slurry whereby floatable minerals in suspension form a surface froth.

Preferably, a stator surrounds the rotor.

- 4 -

Preferably, a peripheral overflow launder extends around the inside top of the tank for recovering mineral enriched froth from the surface.

Preferably, the aeration means include an air blower and a fluid conduit for directing air from the blower into the rotor. More preferably, the conduit includes an axial bore extending through the drive shaft. Alternatively, the conduit is disposed to direct air into the rotor from underneath.

Preferably, the flotation device includes a froth deflection cone extending around the drive shaft adjacent the top of the tank, the smallest diameter of the cone being at its lowermost end nearest the rotor. More preferably, the deflection cone is disposed to deflect froth outwardly toward the overflow launder as it migrates toward the surface of the tank. Even more preferably, the deflection cone is disposed to prevent vortexing at the tank surface.

Preferably, the auxiliary agitator is adapted for use in a flotation device having a tank with a capacity of at least 50m<sup>3</sup>.

#### 15 BRIEF DESCRIPTION OF THE DRAWINGS

A preferred embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a perspective view of an agitator incorporating agitation means according to the invention;

20 Figure 2 is a side view of the agitator of Figure 1;

Figure 3 is a top view of an auxiliary agitator according to the invention; and

Figure 4 is a sectional side view of a typical flotation device incorporating the agitator.

#### PREFERRED EMBODIMENTS OF THE INVENTION

25 Referring to the drawings, there is shown an agitator 1 for a flotation tank 2, which tank contains a slurry incorporating minerals to be extracted. The illustrated tank includes a generally flat base 3 and a substantially cylindrical sidewall 4 extending upwardly from the base. However, it will be appreciated that in alternative embodiments, tanks of other shapes and sizes are used. A peripheral overflow launder 5  
30 extends around the inside top of the sidewall for removing mineral enriched froth as it floats to the surface.

- 5 -

The agitator 1 is disposed to agitate the slurry within the tank. The agitator includes a rotor 6 mounted on one end of a centrally disposed drive shaft 7 extending axially downwardly into the tank and driven by a motor 8 and associated gearbox (not shown). The other end of the drive shaft includes a mounting flange 9 adapted for connection to the motor. A stator 10 is also provided around the rotor.

A froth deflection cone 11 extends around the drive shaft adjacent the top of the tank. The deflection cone is oriented such that its smallest diameter is located at its lowermost end nearest the rotor 6.

An auxiliary agitator 12 is connected to the drive shaft at a position substantially midway between the underside of the deflection cone 11 and the top of the rotor 6, as shown in Figure 1 and Figure 2. The auxiliary agitator 12 includes agitation blades 13 extending radially outwardly from diametrically opposite sides of the shaft 7. Each blade 13 intersects the shaft at an angle of incidence of around 45 degrees to the shaft axis 14.

The blades 13 are connected to the shaft 7 by a clamp 15. The clamp is formed from two clamping halves 16 and 17 secured together by bolts 18 and each including one blade 13. The inner walls of the clamp define a cylindrical clamping surface 19.

A 6mm rubber coating 20 is provided on the outer surfaces of the auxiliary agitator to protect it from chemical and mechanical abrasion.

In use, the agitation blades 13 define an axial impeller to supplement an axial flow induced in the tank by the primary rotor 6. The diameter of the impeller is around 15% to 35% of the diameter of the flotation tank.

An aeration system including an air blower and a fluid conduit (not shown) is also provided to direct air from the blower into the rotor 6. The conduit is defined in part by an axial bore (not shown) extending through the rotor drive shaft 7.

In use, the rotor 6 induces a primary flow through the slurry as indicated by arrows F1. The primary flow continuously recirculates the slurry at the bottom of the tank to maintain the particles in suspension. The aeration system continuously disperses air into the rotor to form fine bubbles, which collide with and adhere to the valuable mineral particles in the slurry and subsequently float to the top of the tank to form a mineral enriched surface froth. As the froth floats toward the surface, it is directed radially outwardly by the deflection cone 11 for recovery through the overflow launder 5.

- 6 -

The primary rotor 6 also induces a secondary flow through the slurry as indicated by arrows F2. However, as flotation devices increase in size, the secondary flow induced by the primary rotor reduces. Accordingly, it has been found that when floatable particles drop out of the froth zone at the tank surface, the secondary flow induced by the primary rotor alone is often not sufficient to draw these particles back into the mixing zone of primary rotor for refloating, thereby reducing the cell efficiency. This problem is particularly relevant in flotation devices of capacity greater than around 150m<sup>3</sup> to 200m<sup>3</sup> or larger.

The auxiliary agitator 12 increases the secondary flow, F2, in large flotation devices to an extent comparable to that of a group of smaller cells of equivalent total volume. It achieves this by inducing a downward current, which increases the secondary flow turnover rate. This, in turn, draws floatable particles that have dropped out of the froth zone down through the tank and into the mixing zone of the primary rotor, thereby increasing the probability that these particles will be refloated, and hence increasing the overall efficiency of the recovery process. In addition, the auxiliary rotor also facilitates dispersion of reagents added to the slurry through a reagent addition tube 21 extending downwardly through the deflection cone 11. This effect occurs primarily because of the increased downward pumping action induced by the auxiliary agitator, which forces the reagent enriched pulp downwards into the primary rotor for refloating. It will be appreciated that the invention thereby provides both practical and commercially significant advantages over the prior art.

It will be appreciated that in other embodiments many components of the flotation device described above may be substituted with suitable alternatives. For example, the auxiliary agitator can be connected to the drive shaft by other means, such as welds or bolts. Also, the coating provided on the outer surfaces of the auxiliary agitator may be formed from an alternative material such as polyethylene and may also be of a different thickness. In one embodiment, the auxiliary agitator includes a curved leading edge, similar to that on a propeller. The auxiliary agitator can also be shaped to have a variable angle of incidence along its length. Moreover, while the invention has been described with reference to conventional flotation cells, it will be appreciated that the same principles may be applied to other flotation cells, such as flash flotation cells, or Skim Air cells.



- 7 -

Although the invention has been described with reference to specific examples, it will be appreciated by those skilled in the art that the invention may be embodied in many other forms.



CLAIMS

1. An auxiliary agitator for a flotation device of the type having a tank, a primary agitator including a primary rotor, drive means, and a drive shaft disposed intermediate the drive means and the primary rotor, the auxiliary agitator including:  
an auxiliary agitation blade adapted, in use, to supplement an axial flow induced in the tank by the primary rotor; and  
connecting means for connecting the blade to the drive shaft intermediate the drive means and the primary rotor.
2. An agitator according to claim 1, wherein the auxiliary agitation blade defines an angle of incidence that is substantially constant along the length of the blade, as in an axial impeller.
3. An agitator according to claim 2, wherein the angle of incidence is between 15 degrees and around 75 degrees with respect to the direction of travel of the blade.
4. An agitator according to claim 1, wherein the auxiliary agitation blade defines an angle of incidence that varies along the length of the blade, as in a propeller.
5. An agitator according to claim 1, wherein the pitch of the blade is adjustable depending on specific system parameters, such as slurry density, slurry viscosity or flow characteristics within the tank.
6. An agitator according to any one of the preceding claims, wherein the blade includes a substantially straight leading edge.
7. An agitator according to any one of claims 1 to 5, wherein the leading edge of the blade is curved.
8. An agitator according to any one of the preceding claims, wherein the blade is releasably connected to the shaft to allow its position relative to the primary rotor to be adjusted.
9. An agitator according to any one of the preceding claims, wherein, in use, the blade is connected to the shaft at around a midheight of the tank.
10. An agitator according to any one of the preceding claims, wherein the connecting means include a clamp.
11. An agitator according to claim 10, wherein the clamp is formed of two inter-engageable clamping halves.
12. An agitator according to claim 11, wherein the two clamping halves are substantially identical.
13. An agitator according to any one of claims 10 to 12, wherein inner walls of the clamp together define a generally cylindrical clamping surface.


14. An agitator according to any one of claims 1 to 9, wherein the connecting means take the form of welds or bolts.
15. An agitator according to any one of the preceding claims, including a resilient protective layer coating its exterior surfaces.
16. An agitator according to claim 15, wherein the protective layer is greater than around 3mm thick.
17. An agitator according to claim 14 or claim 15, wherein the protective layer is between around 5mm and around 7mm thick.
18. An agitator according to any one of the preceding claims, including a pair of the auxiliary blades, in use extending radially outwardly from diametrically opposite sides of the shaft, each blade having associated connecting means.
19. An agitator according to any one of claims 1 to 18, including at least three of the blades, in use equally spaced around the perimeter of the shaft, each blade having associated connecting means.
20. An agitator according to claim 18 or claim 19, wherein, in use, each blade intersects the shaft at an angle of incidence of around 45 degrees.
21. Agitation means for a flotation device of the type having a tank, a primary agitator including a primary rotor, drive means, and a drive shaft disposed intermediate the drive means and the primary rotor, said agitation means including:
  - a drive shaft;
  - a primary rotor connected to one end of the drive shaft to form the primary agitator; and
  - an auxiliary agitator as defined in any one of claims 1 to 20.
22. Agitation means according to claim 21, wherein the auxiliary agitation blade is releasably connected to the shaft to allow its position relative to the primary rotor to be adjusted.
23. Agitation means according to claim 21 or claim 22, being adapted for use in a three phase environment including water, solids and air.
24. A flotation device including:
  - a tank for containing slurry incorporating minerals to be extracted;
  - a feed inlet for admission of slurry into the tank;
  - agitation means, as defined in any one of claims 21 to 23, to agitate the slurry within the tank; and
  - aeration means to aerate the slurry whereby floatable minerals in suspension form a surface froth.

25. A flotation device according to claim 24, including a stator surrounding the rotor.
26. A flotation device according to claim 24 or claim 25, including a peripheral overflow launder extending around the inside top of the tank for recovering mineral enriched froth from the surface.
27. A flotation device according to any one of claims 24 to 26, wherein the aeration means include an air blower and a fluid conduit for directing air from the blower into the rotor.
28. A flotation device according to claim 27, wherein the conduit includes an axial bore extending through the drive shaft.
29. A flotation device according to claim 27 or claim 28, wherein the conduit is disposed to direct air into the rotor from underneath.
30. A flotation device according to any one of claims 24 to 29, including a froth deflection cone extending around the drive shaft adjacent the top of the tank, the smallest diameter of the cone being at its lowermost end nearest the rotor.
31. A flotation device according to claim 30, wherein the deflection cone is disposed to deflect froth outwardly toward the overflow launder as it migrates toward the surface of the tank.
32. A flotation device according to claim 30 or claim 31, wherein the deflection cone is disposed to prevent vortexing at the tank surface.
34. A flotation device according to any one of claims 30 to 32, wherein the auxiliary agitator is located substantially midway between the top of the rotor and the bottom of the deflection cone.
35. A flotation device according to any one of claims 30 to 34, including a reagent addition tube extending downwardly into the tank through the deflection cone.
36. An auxiliary agitator as defined in any one of the preceding claims, adapted for agitating a slurry containing up to around 55% solids.
37. An auxiliary agitator as defined in any one of the preceding claims, adapted for use in a flotation device having a tank with a capacity of at least 50m<sup>3</sup>.
38. An auxiliary agitator as defined in any one of the preceding claims, wherein the auxiliary agitation blade, in use, acts as an axial impeller to supplement an axial flow induced in the tank by the primary rotor.
39. An auxiliary agitator as defined in claim 37, wherein said axial impeller has a diameter of around 15% to around 35% of the tank diameter.

1/3

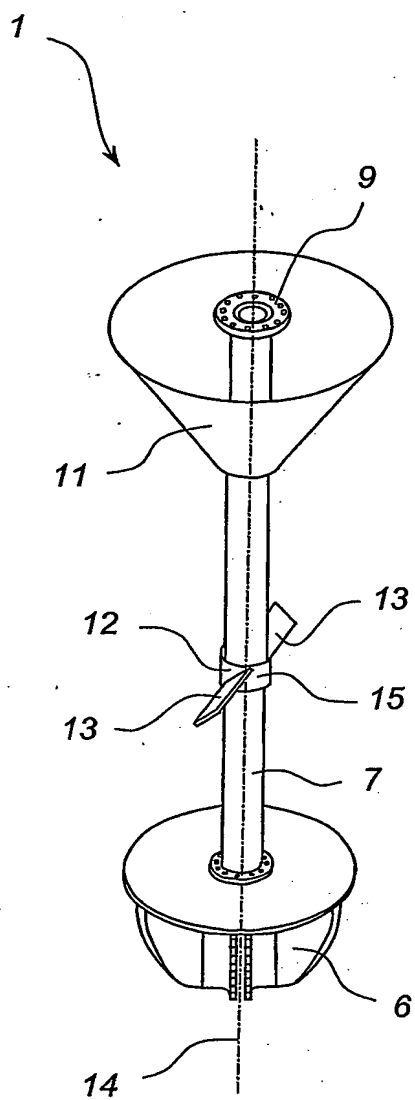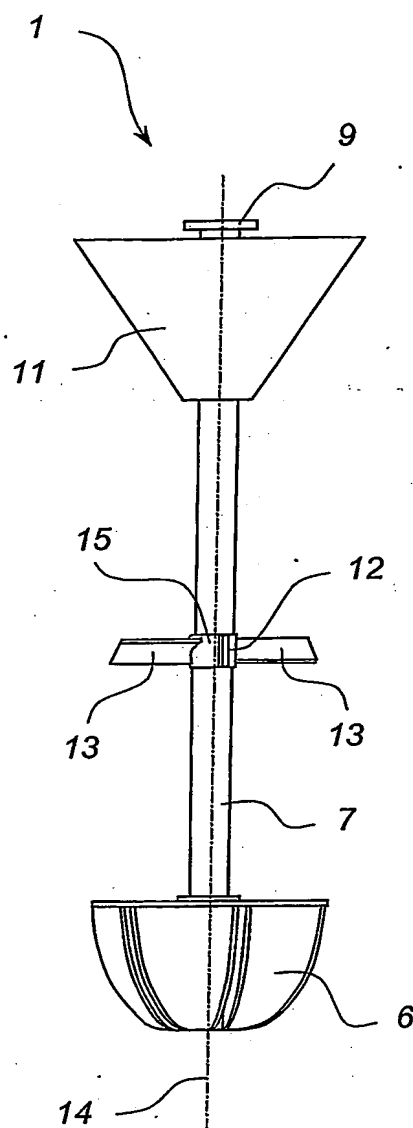**Figure 1****Figure 2**



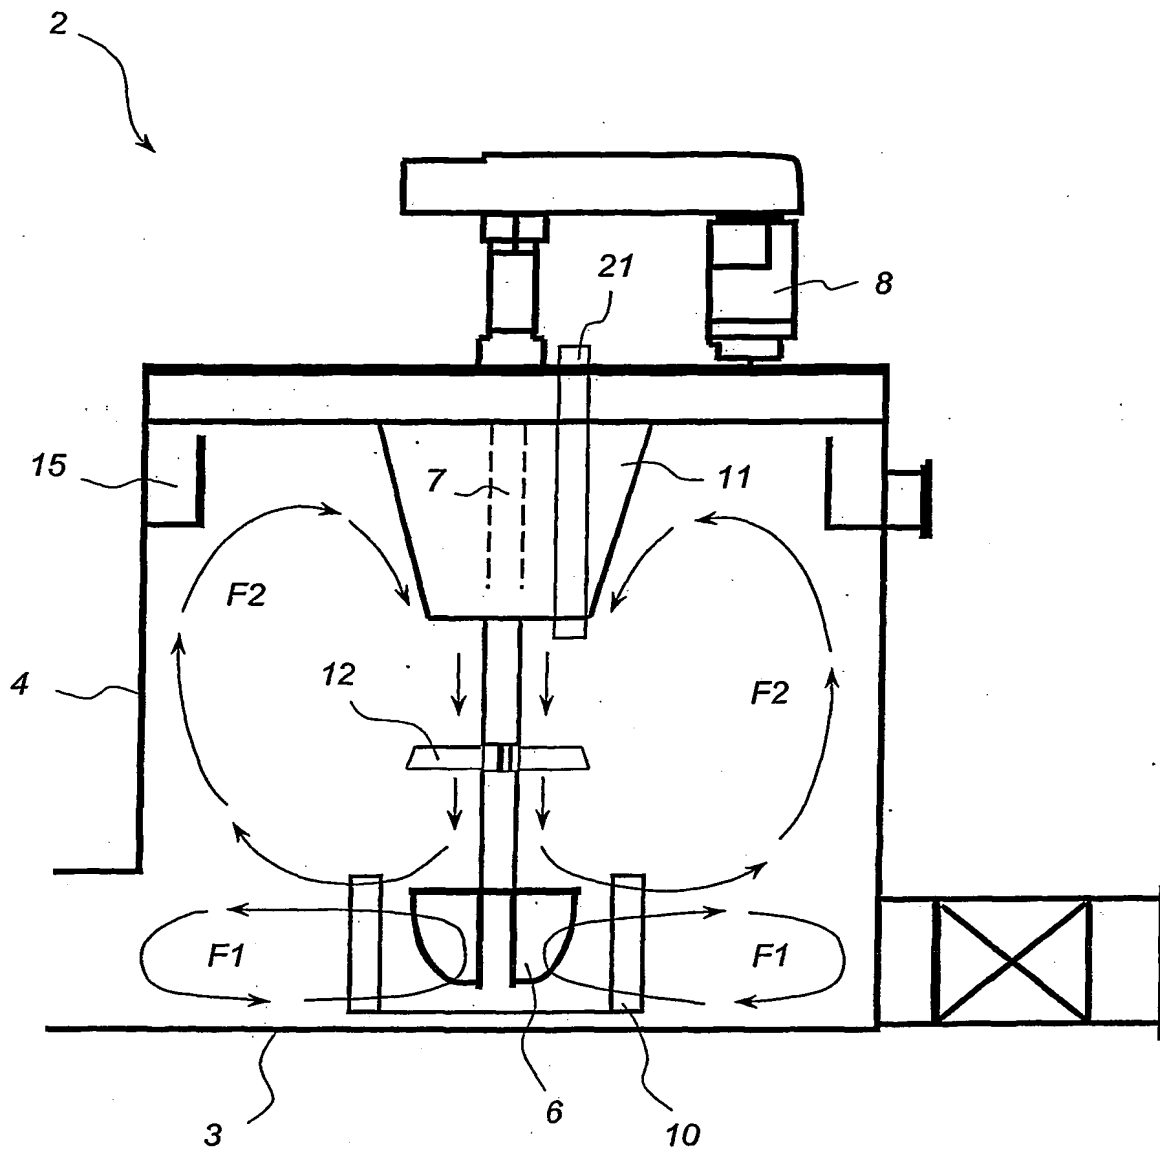

**Figure 4**

# INTERNATIONAL SEARCH REPORT

International application No.  
**PCT/AU2004/000315**

## A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl. <sup>7</sup>: B03D 1/16, 1/18, 1/20, 1/22, B01F 7/22

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC<sup>7</sup> as above

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
Derwent WPI: IPC<sup>7</sup> as above

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6109449 A (Howk et al) 29 August 2000 Whole Document	1 to 39
X	AU 199924989 A1 (Yigit) 16 November 2000 Whole Document	1 to 7

☐ Further documents are listed in the continuation of Box C

☒ See patent family annex

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search  
29 March 2004

Date of mailing of the international search report  
- 2 APR 2004

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE  
PO BOX 200, WODEN ACT 2606, AUSTRALIA  
E-mail address: pct@ipausttralia.gov.au  
Facsimile No. (02) 6285 3929

Authorized officer

  
DAVID K. BELL

Telephone No : (02) 6283 2309



## INTERNATIONAL SEARCH REPORT

International application No.

**PCT/AU2004/000315**

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member	
US 6109449	AU 13264/00	BR 9915029	CA 2349876
	ID 29090	WO 0025930	ZA 200104525
AU 24989/99			
END OF ANNEX			